



PRACTICAL METALS




8145 Bear Creek Rd.
Aledo, TX 76008
Phone (682) 404-1010
office@practicalbuildings.com



Polar White †



Brilliant White



Light Stone †



Ash Gray



Saddle Tan †




Koko Brown



Hawaiian Blue




Deep Blue*



Evergreen



Colony Green



Burgundy



Crimson Red



Desert Sand



Rural Red




Rustic Red †



Burnished Slate




Charcoal Gray



Black



Copper Metallic*



Galvalume

Color samples shown on this page may vary slightly with actual paint color. Actual paint samples are available. We reserve the right to change our color offering at any time.

All colors available in 26 gauge.

* Premium colors (non-standard pricing).

† 10 year paint warranty on select colors.


All colors available in a 40 year paint warranty.




PROUDLY FINISHED WITH
SHERWIN-WILLIAMS
Coil Coatings




"R" PANEL

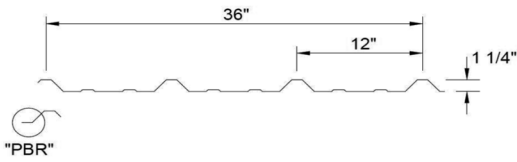

"AG" PANEL



"U" PANEL

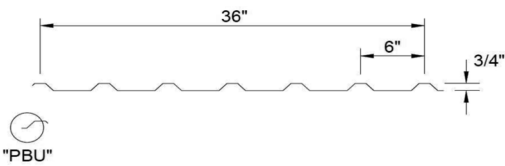


Commercial Standing Seam 16", 18" Wide



Striations Optional
Mechanically seamed

T-12 Soffit Panel 12", 14", 16" Wide



Striations Optional

Residential Standing Seam 12" wide



Striations Optional



WeatherXL Valspar

Hot Dipped Galvanized Steel

Galvalume

Film thickness

Primer (PMY0302)

0.2 to 0.3 mil (front side)
0.1 to 0.2 mil (back side)

0.2 to 0.3 mil (front side)
0.1 to 0.2 mil (back side)

Topcoat

0.7 to 0.8 mil

0.7 to 0.8 mil

Backer

0.3 to 0.4 mil

0.3 to 0.4 mil

Accelerated Weathering

Hours: 200 Total

Chalk : Rating no less than 8

Color: No more than 5 Δ E
Hunter Color Units Max

Hours: 200 Total

Chalk : Rating no less than 8

Color: No more than 5 Δ E
Hunter Color Units Max

ASTM G 23

(Dew Cycle
Weatherometer)

Humidity

ASTM D 2247

ASTM D 1654

Hours: 1000

Rating 10, No Blisters

Rating 10, No Blisters

Hours: 1000

Rating 10, No Blisters

Rating 10, No Blisters

Formability

ASTM D 1737

Pencil Hardness

ASTM D 3363

2T - 4T*

No Loss of Adhesion

2T - 4T*

No Loss of Adhesion

Specular Gloss

ASTM D 523

F - 2H

F - 2H

Impact Resistance

ASTM D 2794

3 x Metal Thickness
in inch-lb*

No Cracking and

No Loss of Adhesion

3 x Metal Thickness
in inch-lb*

No Cracking and

No Loss of Adhesion

Abrasion Resistance

ASTM 968


Falling Sand

35 Plus or minus 5 liters

Falling Sand

35 Plus or minus 5 liters

Paint warranty details available upon request

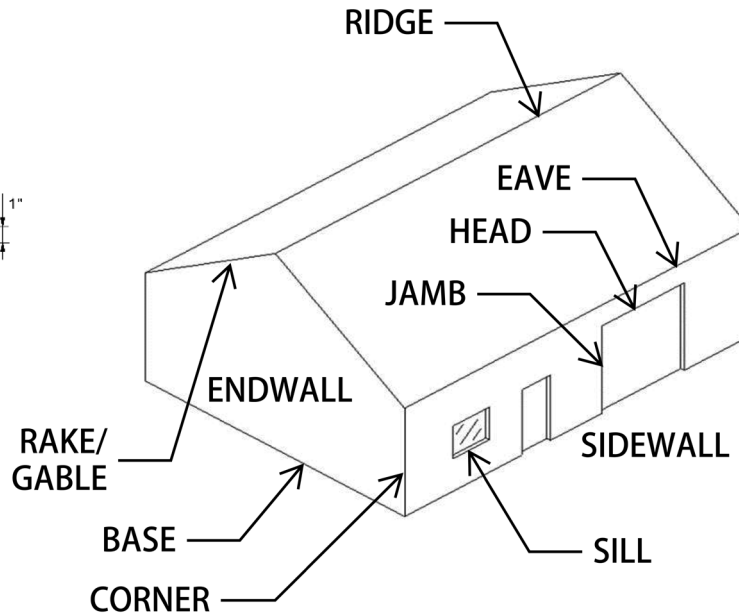

8145 Bear Creek Rd.
Aledo, TX 76008
Phone (682) 404-1010
office@practicalbuildings.com